

# Łożyskowa Knaga Szczękowa




CAM-MATIC®



CARBO-CAM®



KNAGA ZATRZASKOWA

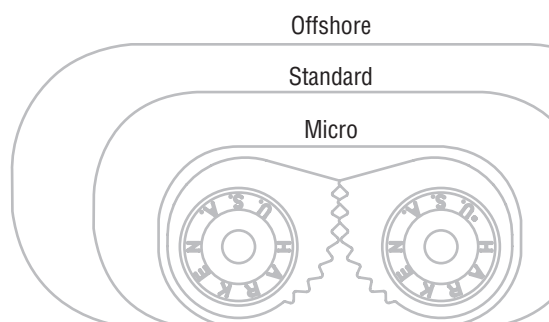


Nr kat.	Opis	Wysokość		Długość		Szerokość		Waga		Lina Ø min. - maks.		Otwory montażowe		Maks. siła robocza		Siła zrywająca		Ramiona
		in	mm	in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
150	Cam-Matic**	1 <sup>3</sup> / <sub>16</sub>	30	2 <sup>9</sup> / <sub>16</sub>	65	1 <sup>1</sup> / <sub>4</sub>	32	2.50	71	1/8 - 1/2	3 - 12	1 <sup>1</sup> / <sub>2</sub>	38	300	136	750	340	Aluminium
280	Offshore Cam-Matic****	1 <sup>1</sup> / <sub>4</sub>	32	3 <sup>3</sup> / <sub>8</sub>	85	1 <sup>1</sup> / <sub>2</sub>	38	5.25	148	1/4 - 5/8	6 - 16	2 <sup>1</sup> / <sub>16</sub>	52	500	227	1000	454	Aluminium
468	Micro Cam-Matic***	7/8	22	1 <sup>7</sup> / <sub>8</sub>	48	1 <sup>5</sup> / <sub>16</sub>	24	0.93	26	3/32 - 1/4	2 - 6	1 <sup>1</sup> / <sub>16</sub>	27	200	91	400	181	Aluminium
365	Carbo-Cam**	1 <sup>3</sup> / <sub>32</sub>	28	2 <sup>9</sup> / <sub>16</sub>	65	1 <sup>1</sup> / <sub>4</sub>	32	1.44	42	1/8 - 3/8	3 - 10	1 <sup>1</sup> / <sub>2</sub>	38	200	91	500	227	Kompozyt węglowy
412	Podwójna Cam-Matic****	2 <sup>1</sup> / <sub>16</sub>	53	3 <sup>1</sup> / <sub>32</sub>	81	1 <sup>1</sup> / <sub>4</sub>	32	4.50	126	5/16 - 3/8	8 - 10	2 <sup>7</sup> / <sub>16</sub>	62	500	227	750	340	Aluminium
471	Micro Carbo-Cam***	7/8	22	1 <sup>7</sup> / <sub>8</sub>	48	1 <sup>5</sup> / <sub>16</sub>	24	0.67	19	1/8 - 1/4	3 - 6	1 <sup>1</sup> / <sub>16</sub>	27	150	68	300	136	Kompozyt węglowy

## Knaga Zatrząskowa

418	Knaga zatrząskowa****	1 <sup>3</sup> / <sub>8</sub>	35	2 <sup>1</sup> / <sub>2</sub>	64	3	76	5.6	159	3/16 - 1/2	5 - 12	2	51	500	227	1000	454	Stal nierdzewna
355	Podkładka do knagi zatrząsk.	1/4	6	3 <sup>3</sup> / <sub>64</sub>	79	1 <sup>9</sup> / <sub>32</sub>	31	1.3	36	—	—	2 <sup>5</sup> / <sub>8</sub>	66	—	—	—	—	—

\*Śruby #10 (5 mm) FH \*\* Śruby #8 (4 mm) RH \*\*\*Śruby 1/4" (6 mm) FH \*\*\*\* Śruby #10 (5 mm) TH

# Zestawy Knag Szczękowych

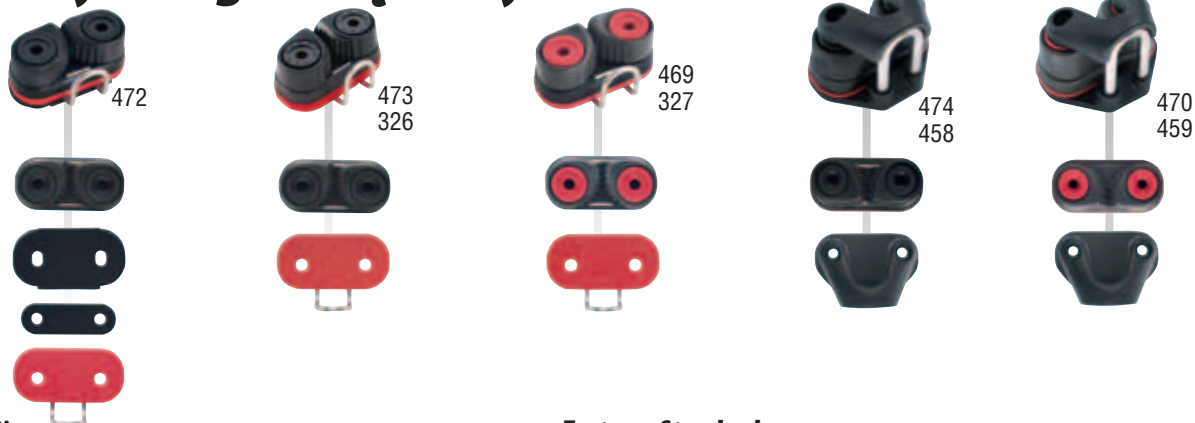

## Zestawy Micro

Nr kat.	Opis	Knaga	Pod- kładka	Przelotka	Waga	
					oz	g
472	Carbo-Cam*/podkładka/przelotka	471	297	475	1.2	33
469	Cam-Matic*/przelotka	468	—	475	1.2	33
473	Carbo-Cam*/przelotka	471	—	475	0.9	26
474	Carbo-Cam*/przelotka kątowa	471	—	476	1.7	47
470	Cam-Matic*/przelotka kątowa	468	—	476	1.9	55

## Zestawy Standard

Nr kat.	Opis	Knaga	Pod- kładka	Przelotka	Waga	
					oz	g
326	Carbo-Cam*/przelotka	365	—	298	2.00	54
327	Cam-Matic*/przelotka	150	—	298	3.00	85
458	Carbo-Cam*/przelotka kątowa	365	—	380	3.36	98
459	Cam-Matic*/Przelotka kątowa	150	—	375	4.42	127